


ABLP

可调式球形锁紧销

RoHS SUS

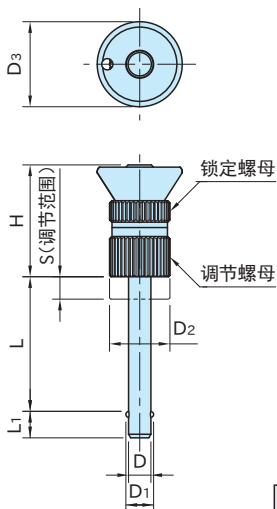

杆、握把、螺母	球
SUS303	SUS440C

型号	D (h9)	D ₁	L (+0.06)	L ₁	D ₃	D ₂	H	S	推荐孔内径 (H11)	最小两面剪切力 (kN)	质量 (g)
ABLP05010-SUS	5	5.5	10	5.9					5	15	25
ABLP05015-SUS			15								26
ABLP05020-SUS			20								27
ABLP05025-SUS			25								28
ABLP05030-SUS			30								29
ABLP06010-SUS	6	6.85	10	6.8	19	13.5	25	8	6	22	27
ABLP06015-SUS			15								28
ABLP06020-SUS			20								29
ABLP06025-SUS			25								30
ABLP06030-SUS			30								31
ABLP06035-SUS			35								32
ABLP06040-SUS			40								33
ABLP06045-SUS	45	34									
ABLP06050-SUS	50	35									
ABLP08020-SUS	8	9.5	20	7.8	25	17	33	10	8	38	63
ABLP08025-SUS			25								65
ABLP08030-SUS			30								67
ABLP08035-SUS			35								68
ABLP08040-SUS			40								71
ABLP08045-SUS			45								73
ABLP08050-SUS			50								75

型 号	D (h9)	D ₁	L (^{+0.6} ₀)	L ₁	D ₃	D ₂	H	S	推荐孔内径 (H11)	最小两面剪切力 (kN)	质量 (g)
ABLP10020-SUS	10	12	20	8.9	25	17	33	10	10	60	69
ABLP10025-SUS			25								73
ABLP10030-SUS			30								76
ABLP10035-SUS			35								78
ABLP10040-SUS			40								81
ABLP10045-SUS			45								84
ABLP10050-SUS			50								87
ABLP10060-SUS			60								93
ABLP12025-SUS	12	14.5	25	9.9	35	26	39.5	12	12	86	179
ABLP12030-SUS			30								183
ABLP12035-SUS			35								187
ABLP12040-SUS			40								192
ABLP12045-SUS			45								196
ABLP12050-SUS			50								199
ABLP12060-SUS			60								209
ABLP12070-SUS			70								218
ABLP12080-SUS	80	226									
ABLP16030-SUS	16	19	30	13.1	35	26	39.5	12	16	153	212
ABLP16035-SUS			35								219
ABLP16040-SUS			40								227
ABLP16045-SUS			45								235
ABLP16050-SUS			50								242
ABLP16060-SUS			60								257
ABLP16070-SUS			70								273
ABLP16080-SUS			80								288

特 点

- 零部件之间频繁进行切换、拼接时，可以更迅速地一键式固定或分离。
- 可以通过使用锁定螺母和调节螺母调节整体长度。

使用示例及使用方法

