

# BJ210

## 可调式限位器(轻量型)




(标准型)




(短小型)



类型	本体	螺栓
BJ210-08	S45C 四氧化三铁膜	SCM435 淬火回火 四氧化三铁膜
BJ210-10		SCM435 淬火回火 四氧化三铁膜
BJ210-12	S45C 四氧化三铁膜	SCM435 淬火回火 高频淬火(圆筒部) 四氧化三铁膜
BJ210-16		SCM435 淬火回火 高频淬火(圆筒部) 四氧化三铁膜

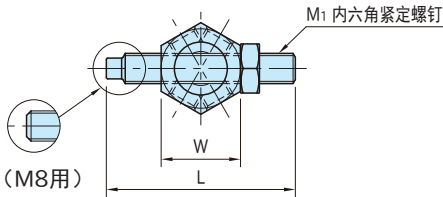

BJ210 (标准型)

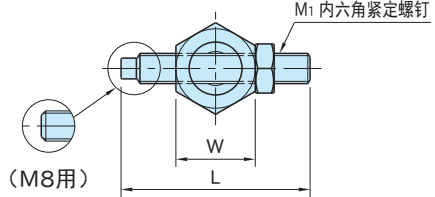

BJ210-S (短小型)

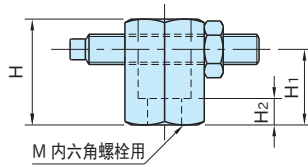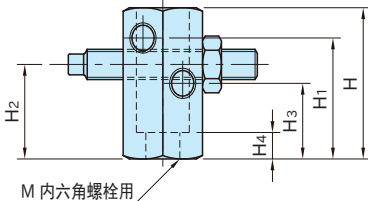

### BJ210 (标准型)

型号	M <sub>1</sub>	L	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	H	W	M	H <sub>4</sub>	质量 (g)
BJ210-08040	M 8×1.25	50	32	25	20	40	21	M 8	7	95
BJ210-12050	M12×1.75	100	50	40	32	60	36	M12	12	500
BJ210-16063	M16×2		63	50	40	80	46	M16	14	1200

### BJ210-S (短小型)

型号	M <sub>1</sub>	L	H <sub>1</sub>	H	W	M	H <sub>2</sub>	质量 (g)
BJ210-08020S	M 8×1.25	50	20	28	21	M 8	7	70
BJ210-10025S	M10×1.5	90	25	35	30	M10	9	195
BJ210-12032S	M12×1.75	100	32	44	36	M12	12	355
BJ210-16040S	M16×2		40	56	46	M16	14	705

### 特 点

也可用于辅助夹紧。