


LHSSB, LHSSP 带衬垫螺栓(带防松)



LHSSB
(黄铜衬垫)



LHSSP
(树脂衬垫)

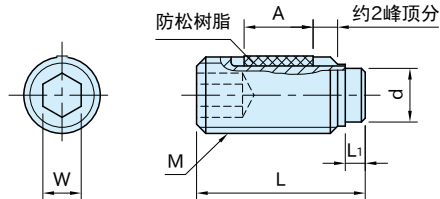

类型	本体	衬垫	防松树脂
LHSSB	S45CF	黄铜(低锡材料)	聚酰胺
LHSSP	四氧化三铁膜	聚缩醛	

规格	M	黄铜衬垫		树脂衬垫		W	力矩(N·m)		
		d	L ₁	d	L ₁		安装	拆下	
LHSSB	04	M 4×0.7	2.5	1.2	2	1.7	2	0.15	0.1
	05	M 5×0.8	3	1.3	3	1.8	2.5	0.25	0.15
LHSSB	06	M 6×1	4	1.9	3.5	1.7	3	0.45	0.25
LHSSP	08	M 8×1.25	5.5	2.4	5	2	4	0.8	0.4
	10	M10×1.5	7	2.6	6.5	2.5	5	1.6	0.9
	12	M12×1.75	8.5	3.3	8	2.9	6	1.8	

LHSSB (黄铜衬垫)

型号	A	L	质量(g)
LHSSB04×6.5	2.5	6.5	0.3
LHSSB04×10.5	3.5	10.5	0.6
LHSSB04×16.5	5	16.5	1
LHSSB04×30.5		30.5	1.9
LHSSB04×40.5		40.5	2.7
LHSSB05×8.5	3.5	8.5	0.6
LHSSB05×12.5	5	12.5	1.1
LHSSB05×20.5	6	20.5	2.1
LHSSB05×30.5		30.5	3.3
LHSSB05×40.5		40.5	4.5

LHSSP (树脂衬垫)

型号	A	L	质量(g)
LHSSP04×7	2.5	7	0.2
LHSSP04×9	3.5	9	0.4
LHSSP04×11		11	0.5
LHSSP04×13	5	13	0.6
LHSSP04×17		17	1
LHSSP04×31		31	2
LHSSP04×41		41	2.7
LHSSP05×9	3.5	9	0.5
LHSSP05×11		11	0.8
LHSSP05×13	5	13	1
LHSSP05×17	6	17	1.5
LHSSP05×21		21	2
LHSSP05×31		31	3.2
LHSSP05×41		41	4.3

LHSSB (黄铜衬垫)

型 号	A	L	质量 (g)
LHSSB06×11.5	3.5	11.5	1.4
LHSSB06×17.5	7	17.5	2.5
LHSSB06×26.5		26.5	4
LHSSB06×41.5		41.5	6.4
LHSSB06×51.5		51.5	8.2
LHSSB06×61.5		61.5	9.8
LHSSB08×12	3.5	12	2.8
LHSSB08×22	8	22	5.6
LHSSB08×32		32	8.7
LHSSB08×52		52	14.8
LHSSB08×62		62	18
LHSSB08×82		82	23.9
LHSSB10×14	5	14	5.4
LHSSB10×18	9	18	6.9
LHSSB10×27		27	11.1
LHSSB10×37		37	16
LHSSB10×52		52	23.1
LHSSB10×62		62	28
LHSSB10×82	82	37.8	
LHSSB12×18.5	8	18.5	10.3
LHSSB12×22.5	10	22.5	12.4
LHSSB12×32.5		32.5	19.3
LHSSB12×42.5		42.5	26.4
LHSSB12×52.5		52.5	33.4
LHSSB12×62.5		62.5	40.3
LHSSB12×82.5	82.5	55	

LHSSP (树脂衬垫)

型 号	A	L	质量 (g)
LHSSP06×11.3	3.5	11.3	1.1
LHSSP06×13.3	5	13.3	1.5
LHSSP06×17.3	7	17.3	2.1
LHSSP06×21.3		21.3	2.7
LHSSP06×26.3		26.3	3.5
LHSSP06×41.3		41.3	6
LHSSP06×51.3		51.3	7.8
LHSSP06×61.3	5	61.3	9.5
LHSSP08×13.6		13.6	2.4
LHSSP08×17.6		17.6	3.5
LHSSP08×21.6		21.6	4.8
LHSSP08×26.6		26.6	6.3
LHSSP08×33.6	8	33.6	8.4
LHSSP08×51.6		51.6	13.9
LHSSP08×61.6		61.6	17
LHSSP08×81.6		81.6	23
LHSSP10×17.9		9	17.9
LHSSP10×21.9	21.9		7
LHSSP10×26.9	26.9		9.5
LHSSP10×33.9	33.9		12.8
LHSSP10×41.9	41.9		16.6
LHSSP10×51.9	10	51.9	21.5
LHSSP10×61.9		61.9	26.3
LHSSP10×81.9		81.9	36.2
LHSSP12×22.1		22.1	9.1
LHSSP12×27.1		27.1	12.9
LHSSP12×34.1	10	34.1	17.8
LHSSP12×42.1		42.1	23.2
LHSSP12×52.1		52.1	30.3
LHSSP12×62.1		62.1	37.4
LHSSP12×82.1		82.1	51.8

特 点

- 衬垫部分使用了黄铜或者聚缩醛，因此不会损伤工件。
- 带有防止松动功能。
 - 对振动强
 - 拔出力矩高
 - 确实定位
 - 大约安装20回之前防止松动功能都能发挥作用。

技术数据

耐热温度 80℃

使用示例及使用方法