

NDXNE

分度柱塞(长行程型)

RHS SUS



NDXNE
(钢铁制、单螺母)




NDXNE-A-SUS
(不锈钢制、单螺母)


★ One Point

行程是普通的1.5倍

类型	本体	旋钮	弹簧	销子
NDXNE NDXNE-W	SUM22L 四氧化三铁膜	聚酰胺 哑光黑色	SUS301	SUM22L HRC58~62
NDXNE-SUS NDXNE-W-SUS	SUS303			SUS420 HRC53~55
NDXNE-A-SUS NDXNE-AW-SUS				SUS303

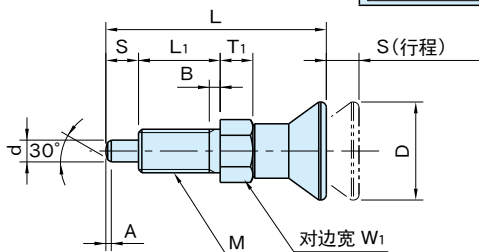

NDXNE **NDXNE-SUS** **NDXNE-A-SUS**
(单螺母)

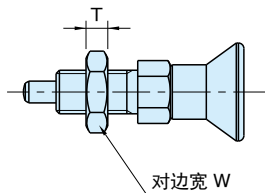

NDXNE-W **NDXNE-W-SUS** **NDXNE-AW-SUS**
(双螺母)

规格	d (-0.02 -0.04)	S	M	L ₁	A	D	L	W ₁	T ₁	W	T	B	载荷(N) 最小~最大
NDXNE	6	3	M 6×0.75	12	0.8	14	33	8	5	10	3	2	4.5~12
NDXNE-W	8	4	M 8×1	15	1	18	40.5	10	6	13	4		6~15
NDXNE-SUS	10	5	M10×1	17	1.3	21	46.5	13	7	17	5	3	5~16
NDXNE-W-SUS	12	6	M12×1.5	20	1.8	25	54.7	14	8	19	6		6~18
NDXNE-A-SUS	16	8	M16×1.5	26	2.3	33	72	19	10	24	8	3	15~45
NDXNE-AW-SUS	20	10	M20×1.5	28	2.8		79	22	12	30	10		15~43

NDXNE | **NDXNE-SUS** | **NDXNE-A-SUS** (单螺母)


钢铁制	不锈钢制 销子有淬火	不锈钢制 销子无淬火	质量 (g)
型 号	型 号	型 号	
NDXNE 6	NDXNE 6-SUS	NDXNE 6A-SUS	5
NDXNE 8	NDXNE 8-SUS	NDXNE 8A-SUS	11
NDXNE10	NDXNE10-SUS	NDXNE10A-SUS	21
NDXNE12	NDXNE12-SUS	NDXNE12A-SUS	31
NDXNE16	NDXNE16-SUS	NDXNE16A-SUS	73
NDXNE20	NDXNE20-SUS	NDXNE20A-SUS	115

NDXNE-W | **NDXNE-W-SUS** | **NDXNE-AW-SUS** (双螺母)

钢铁制	不锈钢制 销子有淬火	不锈钢制 销子无淬火	质量 (g)
型 号	型 号	型 号	
NDXNE 6W	NDXNE 6W-SUS	NDXNE 6AW-SUS	6
NDXNE 8W	NDXNE 8W-SUS	NDXNE 8AW-SUS	16
NDXNE10W	NDXNE10W-SUS	NDXNE10AW-SUS	27
NDXNE12W	NDXNE12W-SUS	NDXNE12AW-SUS	40
NDXNE16W	NDXNE16W-SUS	NDXNE16AW-SUS	91
NDXNE20W	NDXNE20W-SUS	NDXNE20AW-SUS	150

特 点

手动操作型分度柱塞，通过拉伸旋钮即可简单解除定位，放手后，销子在内置弹簧的作用下恢复原来状态。



使用示例及使用方法

根据安装板的厚度，可使用 **KSR** 垫圈。(参照 P. 1311)

技术数据

耐热温度 80℃

■ 销子机械强度表

规 格	容许剪切力(N)	
NDXNE	6	212
NDXNE-W	8	377
NDXNE-SUS	10	589
NDXNE-W-SUS	12	848
NDXNE-A-SUS	16	1507
NDXNE-AW-SUS	20	2355

注意事项

将分度柱塞完全拧入底板使用时，请对底板一侧的螺孔进行倒角加工。

规 格		推荐倒角加工
NDXNE	6	60°倒角 深2.5
NDXNE-W	8	
NDXNE-SUS	10	
NDXNE-W-SUS	12	60°倒角 深3.5
NDXNE-A-SUS	16	
NDXNE-AW-SUS	20	

另售品 NDX/SDX专用螺母

钢铁制	不锈钢制	螺丝尺寸
型 号	型 号	
NDX 6-NUT	NDX 6-NUT-SUS	M 6×0.75
NDX 8-NUT	NDX 8-NUT-SUS	M 8×1
NDX10-NUT	NDX10-NUT-SUS	M10×1
NDX12-NUT	NDX12-NUT-SUS	M12×1.5
NDX16-NUT	NDX16-NUT-SUS	M16×1.5
NDX20-NUT	NDX20-NUT-SUS	M20×1.5