

RLP

导轮销

RHS SUS


IMAO



RLP
(钢铁制)



RLP-SUS
(不锈钢制)

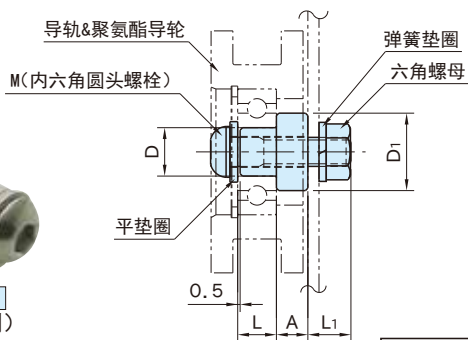

★One Point
偏置量少的类型

类型	本体
RLP	S45C 四氧化三铁膜
RLP-SUS	SUS303

钢铁制 型 号	不锈钢制 型 号	D		L	D ₁	A	M	L ₁	质量 (g)
RLP0605	-	6	-0.004 -0.016	5.5	10	4	M 4×0.7 -16L	5.7	10
RLP0606	-		6	5.2					
RLP0611	-	8	-0.020 -0.032	11	12	5.5	M 4×0.7 -25L	9.2	12
RLP0807	RLP0807-SUS		7	6.5					
RLP0813	-	10	-0.040 -0.055	13	16	6.5	M 5×0.8 -30L	10.5	18
RLP1008	RLP1008-SUS		8	8.9					
RLP1016	-	12	-0.005 -0.020	16	19	7.5	M 6×1 -25L M 6×1 -35L	10.9	30
RLP1210	RLP1210-SUS		10	40					
RLP1216	-	15	-0.040 -0.058	16	22	10	M 8×1.25-30L M 8×1.25-40L	14.9	47
RLP1511	-		11	12					
RLP1517	-	17	-0.005 -0.020	17	25	12	M10×1.5 -35L M10×1.5 -45L	12	80
RLP1712	-		11	16					
RLP1720	-	20	-0.040 -0.058	17	30	13	M12×1.75-45L M12×1.75-55L	18.7	110
RLP2014	-		12	20.7					
RLP2018	-	25	-0.007 -0.028	14	34	13	M16×2 -55L M16×2 -65L	24.8	200
RLP2521	-		18	20.7					
			-0.012 -0.033	21				27.8	270

使用示例及使用方法

请用作导轮和聚氨酯导轮的轴。

注意事项

请根据安装板的厚度,更换内六角圆头螺栓(市场销售品)。