


RS35S-M

滑轨(可断开有锁紧型)



内侧、外侧轨道	保持器	球
SPCC 电镀锌 (铬酸盐光泽)	SECC	碳钢球3 / 16"

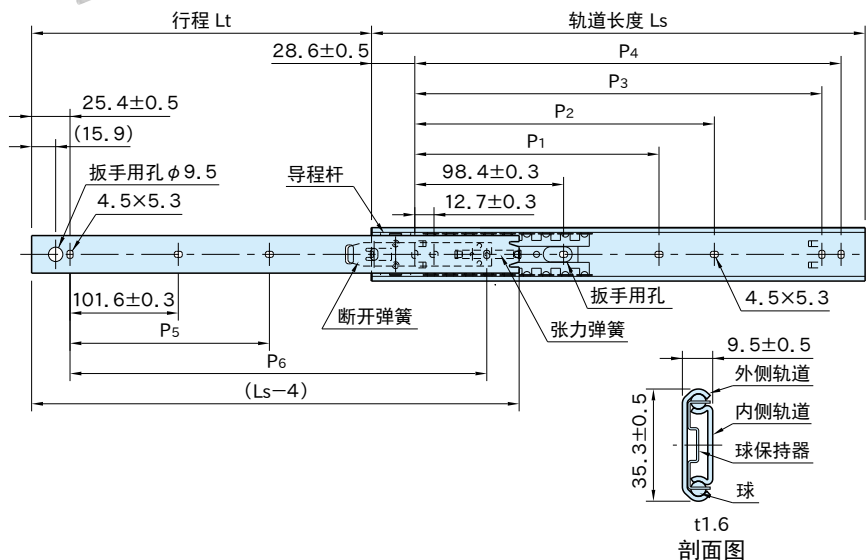

型号	Ls (±0.8)	Lt (±3)	P ₁ (±0.3)	P ₂ (±0.3)	P ₃ (±0.3)	P ₄ (±0.3)	P ₅ (±0.3)	P ₆ (±0.3)	额定载荷 (N / 组)	质量 (g / 条)
RS35S-12M	304.8	224	136.5	—	247.6	260.3	152.4	—	490	300
RS35S-14M	355.6	275	187.3	—	298.4	311.1	203.2	—	400	360
RS35S-16M	406.4	315	238.1	—	349.2	361.9	254.0	—	390	420
RS35S-18M	457.2	330	200.0	288.9	400.0	412.7	203.2	406.4	380	480
RS35S-20M	508.0	381	225.4	339.7	450.8	463.5	228.6	457.2	330	520
RS35S-22M	558.8	406	250.8	390.5	501.6	514.3	254.0	508.0	320	580
RS35S-24M	609.6	432	276.2	441.3	552.4	565.1	279.4	558.8	310	620
RS35S-26M	660.4	483	301.6	492.1	603.2	615.9	304.8	609.6	280	680
RS35S-28M	711.2	493	327.0	542.9	654.0	666.7	330.2	660.4	270	740

特点

- 可断开有锁紧型。满行程时内侧轨道被锁住，操纵断开弹簧的按钮就可以解锁被拉出。插入时同理。
- 也有可断开自动型。(订制品)

注意事项

安装螺栓请使用M4, M3球面圆柱头小螺丝或者扁圆头小螺丝。

参照页

关于各种名称和功能