
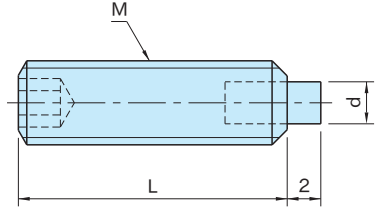


USC

聚氨酯头螺栓



★One Point

衬垫材质为聚氨酯

本体	衬垫
SCM435 四氧化三铁膜 HRC33~39	聚氨酯 肖氏A90 橙色

型 号	M	L	d	W	质量 (g)
USC 5×16	M 5×0.8	16	2.5	2.5	2
USC 5×20		20			3
USC 5×30		30			4
USC 6×20	M 6×1	20	3.5	3	4
USC 6×30		30			6
USC 6×40		40			8
USC 8×20	M 8×1.25	20	5	4	7
USC 8×35		35			12
USC 8×50		50			16
USC 10×25	M10×1.5	25	6	5	13
USC 10×40		40			21
USC 10×60		60			31
USC 12×30	M12×1.75	30	7	6	22
USC 12×50		50			38
USC 12×80		80			61
USC 16×40	M16×2	40	10	8	55
USC 16×60		60			83
USC 16×90		90			125

特 点

带有不易损伤工件的聚氨酯衬垫(用粘合剂固定)。

使用示例及使用方法

