


ABLP

アジャスト ボールロックピン

標準 在庫品 **RHS** SUS



NEW

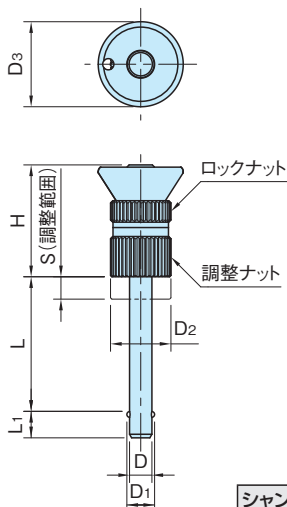

シャンク、ハンドル、ナット	ボール
SUS303	SUS440C

品番	D (h9)	D ₁	L (+0.06)	L ₁	D ₃	D ₂	H	S	推奨穴内径 (H11)	最小二面せん断力 (kN)	質量 (g)	価格
ABLP05010-SUS	5	5.5	10	5.9					5	15	25	5,500
ABLP05015-SUS			15								26	5,500
ABLP05020-SUS			20								27	5,500
ABLP05025-SUS			25								28	5,500
ABLP05030-SUS			30								29	5,700
ABLP06010-SUS	6	6.85	10	6.8	19	13.5	25	8	6	22	27	5,600
ABLP06015-SUS			15								28	5,600
ABLP06020-SUS			20								29	5,600
ABLP06025-SUS			25								30	5,600
ABLP06030-SUS			30								31	5,600
ABLP06035-SUS			35								32	5,600
ABLP06040-SUS			40								33	5,600
ABLP06045-SUS			45								34	5,600
ABLP06050-SUS			50								35	5,600
ABLP08020-SUS	8	9.5	20	7.8	25	17	33	10	8	38	63	5,900
ABLP08025-SUS			25								65	5,900
ABLP08030-SUS			30								67	6,200
ABLP08035-SUS			35								68	6,200
ABLP08040-SUS			40								71	6,200
ABLP08045-SUS	45	73	6,200									
ABLP08050-SUS			50								75	6,200

品番	D (h9)	D ₁	L (+0.06)	L ₁	D ₃	D ₂	H	S	推奨穴内径 (H11)	最小二面せん断力 (kN)	質量 (g)	価格
ABLP10020-SUS	10	12	20	8.9	25	17	33	10	10	60	69	7,300
ABLP10025-SUS			25								73	7,300
ABLP10030-SUS			30								76	7,500
ABLP10035-SUS			35								78	7,500
ABLP10040-SUS			40								81	7,500
ABLP10045-SUS			45								84	7,500
ABLP10050-SUS			50								87	7,500
ABLP10060-SUS			60								93	7,700
ABLP12025-SUS	12	14.5	25	9.9	35	26	39.5	12	12	86	179	7,600
ABLP12030-SUS			30								183	7,800
ABLP12035-SUS			35								187	7,800
ABLP12040-SUS			40								192	7,800
ABLP12045-SUS			45								196	7,800
ABLP12050-SUS			50								199	7,800
ABLP12060-SUS			60								209	8,000
ABLP12070-SUS			70								218	8,000
ABLP12080-SUS	80	226	8,200									
ABLP16030-SUS	16	19	30	13.1	35	26	39.5	12	16	153	212	10,800
ABLP16035-SUS			35								219	10,800
ABLP16040-SUS			40								227	10,800
ABLP16045-SUS			45								235	10,800
ABLP16050-SUS			50								242	10,800
ABLP16060-SUS			60								257	11,400
ABLP16070-SUS			70								273	11,400
ABLP16080-SUS			80								288	11,900

特長

- ・頻繁に繰り返される、加工物とパーツなどの接合をスピーディーにワンタッチ操作で完全固定、分離できます。
- ・ロックナットと調整ナットを使用して、長さの調整が可能です。

使用例・使用方法

