



ATB

可调型链条连接块

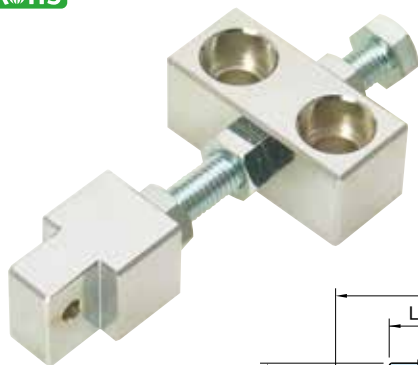

| | |
|-----------------|------------|
| 本体 | 螺栓、螺母 |
| SS400 锌三价铬酸盐 | S45C 镀锌 |

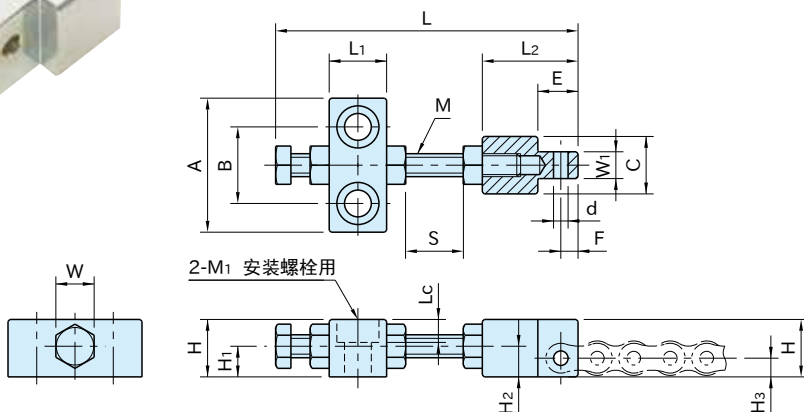

| 型号 | 链条规格 | S | L | L ₂ | F | H | H ₃ | C | M ₁ | A | B | L ₁ |
|-------|------|------|-------|----------------|-----|----|----------------|----|----------------|----|----|----------------|
| ATB35 | 35 | 0~20 | 79 | 25 | 4.5 | 15 | 6.5 | 15 | M 6 | 35 | 20 | 15 |
| ATB40 | 40 | 0~28 | 103 | 30 | 6 | 20 | 8 | 20 | M 8 | 45 | 25 | 20 |
| ATB50 | 50 | 0~36 | 128 | 36 | 7.5 | 25 | 10 | 25 | M10 | 55 | 30 | 25 |
| ATB60 | 60 | 0~45 | 152.5 | 42 | 9 | 28 | 11.5 | 28 | M12 | 65 | 40 | 28 |
| ATB80 | 80 | 0~56 | 191 | 51 | 12 | 35 | 14.5 | 35 | M16 | 80 | 45 | 35 |

| 型号 | H ₁ | H ₂ | d | W ₁ | E | L _c | W | M | 质量 (g) |
|-------|----------------|----------------|-----|----------------|------|----------------|----|----------|--------|
| ATB35 | 8 | 8 | 3.8 | 7 | 10.5 | 6 | 10 | M 6×1 | 100 |
| ATB40 | 10 | 10 | 4.2 | 10.6 | 13 | 8 | 13 | M 8×1.25 | 220 |
| ATB50 | 13 | 12.5 | 5.3 | 13.2 | 16.5 | 10 | 17 | M10×1.5 | 420 |
| ATB60 | 15 | 14 | 6.2 | 17.2 | 19.5 | 12 | 19 | M12×1.75 | 645 |
| ATB80 | 19 | 17.5 | 8.2 | 22 | 26 | 16 | 24 | M16×2 | 1240 |